



VIEWPixx / EEG



- 24 TTL trigger outputs
- Digital outputs feature microsecond synchronization to video refresh
- Deterministic timing between reception of video signal and update of display pixels
- 8-bit RGB intensity
- 1920 x 1080 resolution at 120 Hz
- Pixel rise and fall time symmetry
- Scanning LED backlight with direct LED array

120 Hz CRT Replacement



OVERVIEW

The VIEWPixx /EEG is an affordable high quality display which has been optimized specifically for triggering external data acquisition systems to precisely timed visual stimuli. The VIEWPixx /EEG features LCD glass with the fastest possible pixel response, and a panel controller which has been custom designed for neurophysiology, cognition, and psychophysics research. Our innovative scanning LED backlight design eliminates ghosting, and has superior display uniformity. In addition, the VIEWPixx /EEG includes 24 TTL output triggers for synchronizing external data acquisition systems such as EEG and eye trackers with microsecond precision. The triggers can also be used to initiate external stimulators such as TMS. The levels of the 24 TTL outputs are controlled by the 8-bit RGB components of the display's top-left pixel. This strategy is simple to program with any stimulus generation software, and guarantees perfect synchronization between video and external hardware.

Authorized Distributor



- p** 1300 934 947 **f** 1300 734 712
- w** www.symbioticdevices.com.au
- e** team@symbioticdevices.com.au
- a** Unit 6, 105-111 Ricketts Road
Mount Waverley, VIC 3149

VPixx Technologies Inc.
630 Clairevue West, suite 301
Saint-Bruno, QC Canada, J3V 6B4

SPECIFICATIONS

LCD SPECIFICATIONS

- Display resolution: 1920(H) x 1080(V) pixels
- 24-inch display size (diagonal)
- Pixel arrangement: RGB (Red dot, Green dot, Blue dot) vertical strip
- TFT LCD
- Contrast ratio: typical 1000:1
- Viewing angle: 170° (Horizontal), 160° (Vertical)
- Polarizer surface: Antiglare
- 100 Hz to 120 Hz refresh rate with zero latency stimulus presentation
- 60 Hz to 100 Hz refresh rate with internal frame buffering

PIXEL SPECIFICATIONS

- Pixel rise and fall time symmetry
- Pixel response time : 1 ms typical (black to white)
- 8 bits of resolution on each of the RGB channels
- Pixel pitch: 0.2715(H) x 0.2715(V) mm

BACKLIGHT SPECIFICATIONS

- Luminance: 100 cd/m²
- Scanning LED backlight
- Full array of white LEDs
- Display luminance uniformity: 95% over 95% of display area
- Display color uniformity: 90% over 95% of display area

VIDEO PROCESSING

- Video input: 1920 x 1080 pixels, 60 to 120 Hz, 24 bits (Dual link DVI)
- Deterministic timing between reception of video signal and update of display pixels
- Completely bypass all image processing “enhancements” prevalent in standard consumer LCD panels

DIGITAL OUTPUT

- Number of digital outputs: 24 on DB-25 connector
- Controlled by the first pixel (8-bit Red, 8-bit Green and 8-bit Blue)
- Output drive stage: 5 V through 25 k Ω series resistor
- Maximum output current:
 - Source: 15 mA
 - Sink: 12 mA

POWER


- Power consumption: 100 W
- Input voltage: 12 VDC - 8.33 A
- International AC adaptor input: 90 VDC - 264 VDC (47 Hz - 63 Hz)

VIEWPixx Stand

- Mounting standards: VESA MIS-D/E, MIS-F
- Hole pattern: 100 x 100 mm & 75 x 75 mm

Lift	Tilt	Pan	Rotation	VESA
5" 13 cm	30°	Base 360°	90° P/L	MIS-D/E MIS-F

PIXEL RESPONSE TIME INFORMATION 120 Hz ALTERNATING WHITE BLACK

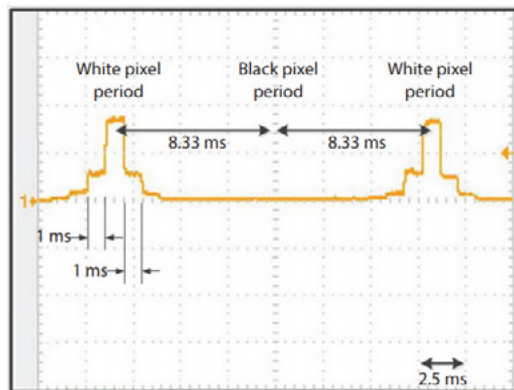

*****Plug and play monitor, no configuration required*****

ORDERING INFORMATION

Description: VIEWPixx /EEG: LCD display 1920 x 1080 @ 120 Hz,
scanning white LED backlight
P/N: VPX-VPX-2006B

